

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

101019919

Copy for the designated Office (DO/US)

PATENT COOPERATION TREATY

PCT

COMMUNICATION IN CASES FOR WHICH
NO OTHER FORM IS APPLICABLE

From the INTERNATIONAL BUREAU

To:

ARCHER, Philip, Bruce
Urquhart-Dykes & Lord
New Preistgate House
57 Priestgate
Peterborough
Cambs PE1 1JX
ROYAUME-UNI

Date of mailing (day/month/year) 28 June 2002 (28.06.02)	
Applicant's or agent's file reference P54615WO	REPLY DUE see paragraph 1 below
International application No. PCT/GB01/01958	International filing date (day/month/year) 04 May 2001 (04.05.01)
Applicant DELPHI TECHNOLOGIES INC.	

1. ☐ REPLY DUE within _____ months/days from the above date of mailing
☐ NO REPLY DUE, however, see below
☒ IMPORTANT COMMUNICATION
☐ INFORMATION ONLY

2. COMMUNICATION:

The International Bureau has been informed by the receiving Office, on 19 June 2002, that an erroneous international filing date was indicated in the request form, which has now been corrected to read:

04 May 2001

A republication of the front page of the international application will take place as soon as possible.

A copy of this communication has been sent to the receiving Office and to the designated Offices.

RECEIVED
AUG 02 2002
GROUP 3600

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No. (41-22) 740.14.35	Authorized officer Ingrid AULICH Telephone No. (41-22) 338.83.38
--	--

101019919

Copy for the receiving Office (RO/GB)

PATENT COOPERATION TREATY

PCT

From the INTERNATIONAL BUREAU

**COMMUNICATION IN CASES FOR WHICH
NO OTHER FORM IS APPLICABLE**

To:

ARCHER, Philip, Bruce
Urquhart-Dykes & Lord
New Preistgate House
57 Priestgate
Peterborough
Cambs PE1 1JX
ROYAUME-UNI

Date of mailing (day/month/year) 28 June 2002 (28.06.02)	
Applicant's or agent's file reference P54615WO	REPLY DUE see paragraph 1 below
International application No. PCT/GB01/01958	International filing date (day/month/year) 04 May 2001 (04.05.01)
Applicant DELPHI TECHNOLOGIES INC.	

1. ☐ REPLY DUE within _____ months/days from the above date of mailing
☐ NO REPLY DUE, however, see below
☒ IMPORTANT COMMUNICATION
☐ INFORMATION ONLY

2. COMMUNICATION:

The International Bureau has been informed by the receiving Office, on 19 June 2002, that an erroneous international filing date was indicated in the request form, which has now been corrected to read:

04 May 2001

A republication of the front page of the international application will take place as soon as possible.

A copy of this communication has been sent to the receiving Office and to the designated Offices.

RECEIVED
AUG 02 2002
GROUP 3600

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No. (41-22) 740.14.35	Authorized officer Ingrid AULICH Telephone No. (41-22) 338.83.38
--	--

PCT

NOTICE INFORMING THE APPLICANT OF THE
COMMUNICATION OF THE INTERNATIONAL
APPLICATION TO THE DESIGNATED OFFICES

(PCT Rule 47.1(c), first sentence)

From the INTERNATIONAL BUREAU

To:

ARCHER, Philip, Bruce
Urquhart-Dykes & Lord
New Preistgate House
57 Priestgate
Peterborough
Cambs PE1 1JX
ROYAUME-UNI

Date of mailing (day/month/year) 15 November 2001 (15.11.01)		IMPORTANT NOTICE	
Applicant's or agent's file reference P54615WO			
International application No. PCT/GB01/01958	International filing date (day/month/year) 17 April 2001 (17.04.01)	Priority date (day/month/year) 05 May 2000 (05.05.00)	
Applicant DELPHI TECHNOLOGIES INC. et al			

1. Notice is hereby given that the International Bureau has **communicated**, as provided in Article 20, the international application to the following designated Offices on the date indicated above as the date of mailing of this notice:

US

In accordance with Rule 47.1(c), third sentence, those Offices will accept the present notice as conclusive evidence that the communication of the international application has duly taken place on the date of mailing indicated above and no copy of the international application is required to be furnished by the applicant to the designated Office(s).

2. The following designated Offices have waived the requirement for such a communication at this time:

EP

The communication will be made to those Offices only upon their request. Furthermore, those Offices do not require the applicant to furnish a copy of the international application (Rule 49.1(a-bis)).

3. Enclosed with this notice is a copy of the international application as published by the International Bureau on 15 November 2001 (15.11.01) under No. WO 01/86167

REMINDER REGARDING CHAPTER II (Article 31(2)(a) and Rule 54.2)

If the applicant wishes to postpone entry into the national phase until 30 months (or later in some Offices) from the priority date, a **demand for international preliminary examination** must be filed with the competent International Preliminary Examining Authority before the expiration of 19 months from the priority date.

It is the applicant's sole responsibility to monitor the 19-month time limit.

Note that only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination (at present, all PCT Contracting States are bound by Chapter II).

REMINDER REGARDING ENTRY INTO THE NATIONAL PHASE (Article 22 or 39(1))

If the applicant wishes to proceed with the international application in the **national phase**, he must, within 20 months or 30 months, or later in some Offices, perform the acts referred to therein before each designated or elected Office.

For further important information on the time limits and acts to be performed for entering the national phase, see the Annex to Form PCT/IB/301 (Notification of Receipt of Record Copy) and the PCT Applicant's Guide, Volume II.

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No. (41-22) 740.14.35	Authorized officer J. Zahra	RECORDS	RAZ
	Telephone No. (41-22) 338	DIARY	ED
		ACTIONED	

10/079919

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION


(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
15 November 2001 (15.11.2001)

PCT

(10) International Publication Number
WO 01/086167 A1

- (51) International Patent Classification⁷: F16D 65/12 (74) Agent: ARCHER, Philip, Bruce; Urquhart-Dykes & Lord, New Preistgate House, 57 Priestgate, Peterborough, Cambs PE1 1JX (GB).
- (21) International Application Number: PCT/GB01/01958
- (22) International Filing Date: 4 May 2001 (04.05.2001) (81) Designated State (*national*): US.
- (25) Filing Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (26) Publication Language: English
- (30) Priority Data: 0010810.0 5 May 2000 (05.05.2000) GB Published: — with international search report
- (71) Applicant (*for all designated States except US*): DELPHI TECHNOLOGIES INC. [US/US]; S 725 Delphi Drive, M/C 483-400-603, Troy, MI (US). (48) Date of publication of this corrected version: 15 August 2002
- (72) Inventors; and (15) Information about Correction: see PCT Gazette No. 33/2002 of 15 August 2002, Section II
- (75) Inventors/Applicants (*for US only*): LARKIN, James, Anthony [GB/GB]; 32 Oakfield Road, Rugby, Warwickshire CV22 0AU (GB). THORPE, William, Anthony [GB/GB]; 6 Cedar Court, New Road, Burbage, Leicestershire LE10 2AW (GB). *For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD AND APPARATUS FOR MOUNTING A BRAKE DISC WITH RESILIENT BIASING MEANS

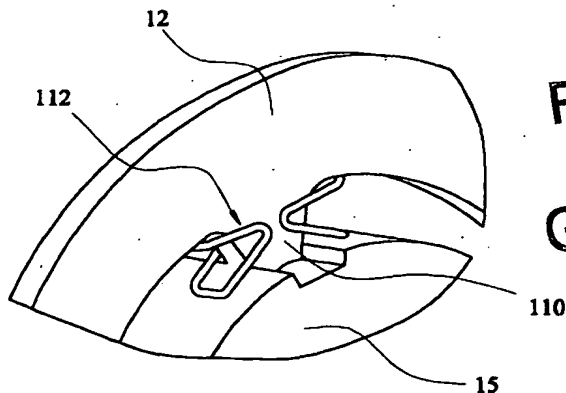

RECEIVED
OCT 02 2002
GROUP 3600

(57) Abstract: A disc brake (10) of the kind comprising an axially fixed hub (15) and at least one slidable brake disc (12, 14) comprises resilient means (26) acting between the disc (12, 14) and the hub (15) to control certain aspects of the movement of the brake disc (12, 14) during use. Despite the thermal differential (A) arising in use between the brake disc (12, 14) and the central hub (15) due to the localised heat generation (E) of the spot-type automotive brake (10) and the mass and thermal capacity differences between the hub (15) and the brake disc (12, 14), whereby the hub would be expected to provide a more satisfactory mounting, resilient means (26) acting between the disc (12, 14) and the hub to control the disc dynamics is mounted on the disc (12, 14), this leading to advantages in terms of independence of the resilient bias with respect to disc position and disc (12, 14) relationship to another disc (if present) and with respect to simplicity of mounting and avoidance of dirt entrapment.

WO 01/086167 A1

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 November 2001 (15.11.2001)

PCT

(10) International Publication Number
WO 01/86167 A1

(51) International Patent Classification⁷: **F16D 65/12**

Anthony [GB/GB]; 32 Oakfield Road, Rugby, Warwickshire CV22 0AU (GB). **THORPE, William, Anthony** [GB/GB]; 6 Cedar Court, New Road, Burbage, Leicestershire LE10 2AW (GB).

(21) International Application Number: PCT/GB01/01958

(22) International Filing Date: 17 April 2001 (17.04.2001)

(74) Agent: **ARCHER, Philip, Bruce**; Urquhart-Dykes & Lord, New Preistgate House, 57 Priestgate, Peterborough, Cambs PE1 1JX (GB).

(25) Filing Language: English

(26) Publication Language: English

(81) Designated State (*national*): US.

(30) Priority Data:
0010810.0 5 May 2000 (05.05.2000) GB

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(71) Applicant (*for all designated States except US*): **DELPHI TECHNOLOGIES INC.** [US/US]; S 725 Delphi Drive, M/C 483-400-603, Troy, MI (US).


Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **LARKIN, James,**

(54) Title: METHOD AND APPARATUS FOR MOUNTING A BRAKE DISC WITH RESILIENT BIASING MEANS

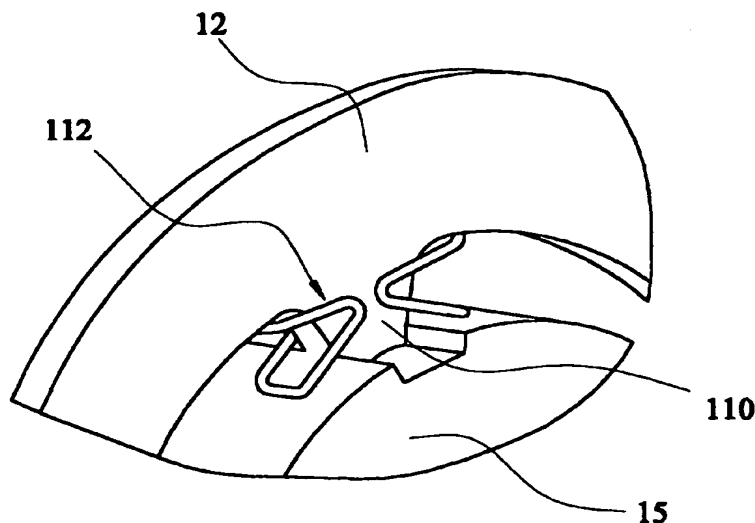

(57) Abstract: A disc brake (10) of the kind comprising an axially fixed hub (15) and at least one slidable brake disc (12, 14) comprises resilient means (26) acting between the disc (12, 14) and the hub (15) to control certain aspects of the movement of the brake disc (12, 14) during use. Despite the thermal differential (A) arising in use between the brake disc (12, 14) and the central hub (15) due to the localised heat generation (E) of the spot-type automotive brake (10) and the mass and thermal capacity differences between the hub (15) and the brake disc (12, 14), whereby the hub would be expected to provide a more satisfactory mounting, resilient means (26) acting between the disc (12, 14) and the hub to control the disc dynamics is mounted on the disc (12, 14), this leading to advantages in terms of independence of the resilient bias with respect to disc position and disc (12, 14) relationship to another disc (if present) and with respect to simplicity of mounting and avoidance of dirt entrapment.

WO 01/86167 A1

METHOD AND APPARATUS FOR MOUNTING A BRAKE DISC WITH RESILIENT BIAISING MEANS

This invention relates to a method and apparatus for mounting a brake disc in a disc brake. A particular application of the invention is to a spot-type automotive disc brake in which at least one, and preferably two brake discs are mounted for axial movement in use with respect to a central drive hub which drives the discs and on which they exert a braking effect during use. Typically, the central drive hub is a wheel mounting of an automobile. Certain aspects of the invention may find application outside the confines of spot-type automotive disc brakes. We have established that spot-type single or multi-disc disc brakes of the kind comprising axially moveable discs can provide significant advantages over conventional spot-type automotive disc brakes. These advantages are set out in a series of patent applications which we have filed covering various aspects of the constructional differences between such brakes and conventional automotive disc brakes.

One aspect of these constructional differences relates to the use of resilient means acting between the one or more brake discs and the rotatable mounting therefor, such resilient means being provided to control certain aspects of the dynamics or movement of the brake discs during use. Reference is made to the disclosure in WO 98/26192 (docket 2558) for a representative prior disclosure in this regard, and likewise too WO 98/25804 (docket 2561). This latter disclosure concerns a disc brake system in which a plurality of leaf springs (32, 42) mounted on a hub (16) and engaging the brake disc (12) apply radially-directed forces between the disc and the hub.

However, we have discovered that the mode of mounting the resilient means with respect to the drive hub is of significance in relation to the effective operation of the resilient means for the brake as a whole, not to mention the
5 resilient function itself.

As a matter of simple design principles, it is to be expected that the optimum arrangement would be as disclosed in our above-identified prior applications in which the
10 resilient means is mounted on the hub and exerts its resilient or biasing effect on the disc by virtue of limited contact with the disc at certain well defined locations depending on the exact resilient means (or spring) design and the spring location.

15 Such an approach is consistent with the design principles emerging from the basic structure of the disc brake in which the relatively massive central hub provides a convenient reference base not only structurally for the mounting of the
20 biasing springs, but also a relatively massive heat sink whereby a substantial thermal gradient exists in use between the brake disc with its locally-generated thermal energy and relatively low thermal capacity, whereby thermal factors favour minimising the numbers of components to be subjected
25 to frequent substantial thermal gradients, particularly components such as springs which are reliant upon thermally sensitive physical properties such as resilience.

However, we have discovered that despite the fact that the
30 obviously apparent factors favour the adoption of the disc-mounting principles (with respect to resilient bias) disclosed in the prior art, there are significant and unexpected compensatory advantages in adopting the reverse approach wherein it is the disc itself which provides a

mounting base for the resilient means (for example a series of circumferentially-spaced springs), whereby these can be considered as exerting a resilient bias which is directed from their mounting base on the disc to the rotatable disc-mounting hub, contrary to the teachings of the prior art.

According to the invention there is provided a method and apparatus as defined in the accompanying claims.

10 In embodiments of the invention there are provided resilient means adapted to be mounted on the axially-slidable brake disc in various ways and in various formats providing individual variations in ease of construction and mounting.

15 In one embodiment the individual resilient means straddle (either as a unitary construction or as to individual resilient elements) a series of projecting drive keys constructed to slidably cooperate with a series of complementary keyways formed in the rotatable mounting hub
20 for the brake disc. This arrangement provides simplicity of achieving equi-spaced and likewise-balanced application of the resilient bias, without the need for cap screws or similar (potentially liable to corrosion) mounting means.

25 The location of the spring or other resilient means with respect to the disc is achieved in the embodiments by use of a spring configuration which is adapted to cooperate with the structure of the disc. For example, where a wire-format spring is adopted, then it becomes feasible for a structure
30 to be adopted for that spring in which the spring is self-locating with respect to the external profile of the disc and passing from one side of the disc to the other as necessary for location and loading purposes. Where a leaf-spring format is adopted, it becomes feasible for the spring

to adopt the use of a pair of gripping flanges adapted to engage on opposite sides of a relevant portion of the disc.

Where a wire-format spring is adopted, a related advantage achieved is with respect to the self-cleaning ability of the brake disc and mounting hub assembly, with respect to which the adoption of a wire spring format provides significantly enhanced ability to allow the escape of particulate and other detritus and other foreign matter whether wet or dry.

10

A further practical advantage arising from the mounting of the resilient means on the brake disc or discs relates to the dynamics of the axially slidable mounting of the brake disc or discs with respect to the drive hub or mounting means therefor. We have discovered that one result of the mounting of the resilient means on the hub itself in prior proposals is that appreciable variations in the spring force arise from disc movement itself and from the adoption of two or more discs mounted in face-to-face relationship on the same hub or mounting.

20

By adopting the concept of mounting the resilient means on the disc or discs themselves an independence of spring effect is achieved since for each spring its interaction with the disc is constant at all times and the axial sliding movement of the disc relative to the hub has negligible effect on the spring interaction with this latter structure since the resilient means slides axially with the disc. Where two or more discs are employed, the spring effect for each is achieved by an identical spring assembly, or a suitably proportioned spring assembly, in order to achieve an identical net spring effect.

25

30

In the embodiments of the present invention the disc brake

incorporates resilient means both in relation to the mounting of the brake discs on their mounting hub and in relation to the brake friction elements or pads in relation to their fixed mounting or caliper.

5

The resilient means are of a structure and strength chosen to be capable of, both in the case of the brake discs and in the case of the brake friction elements, maintaining these components of the brake assembly in their required working attitudes with respect to the structures on which they are mounted. In other words, the springs or resilient means for the brake discs are constructed so as to hold the brake discs in non-tilted working attitudes as they rotate. Likewise, the resilient means for the friction elements or pads maintain these latter structures in their required attitudes with respect to their fixed mounting or caliper. In both cases, the resilient nature of the resilient means permits, under the dynamic conditions arising during use of the vehicle and due to engine' vibration and vehicle motion/road surface induced vibration and similar factors, a degree of movement from the defined working position (as opposed to the linear axial sliding movement needed to effect friction element-to-disc engagement and disengagement when commencing and terminating braking) which is needed under normal conditions of vehicle use.

In this regard, it is to be noted that the resilient means or springs used in the embodiments in relation to the friction elements for maintaining same in their normal untilted attitudes, differ significantly from the springs disclosed in the above-identified WO 98/25804 and WO 98/26192 specifications in which the pad springs are mere anti-rattle springs not adapted to hold the brake pads against tilting movement, but merely to avoid rattling.

Moreover, in the embodiments of the present invention the springs for the discs and for the pads are balanced in terms of their relative loading applied to the discs and the pads in order to achieve the necessary separation of same when
5 braking is discontinued and yet holding the pads and discs against tilting during use. Thus, the spring forces exerted on the pads or friction elements of the present invention are much stronger than those needed merely to prevent rattling or noise suppression. The spring forces are
10 sufficient to restrain the slidable brake pads or friction elements from moving into contact with the brake discs in an uncontrolled manner. The use of the substantially stronger pad springs in the present embodiments assists in positioning the outer rims of the brake discs in their
15 brake-off position for reducing residual brake torque.

Embodiments of the invention will now be described by way of example with reference to the accompanying drawings in which:

20

Figure 1 shows a diagrammatic representation of the thermal and related mass aspects and dynamic aspects of a spot-type disc brake having resilient means adapted to act between a relatively massive
25 hub and a pair of axially slidable brake discs;

30

Figures 2, 3, 4 and 5 show a first embodiment of the invention, namely a perspective view of a portion of a brake disc and hub assembly with associated resilient means acting therebetween, and a plan view and a side elevation and an end elevation view respectively of the closed loop format wire spring which constitutes the resilient means, the directions of viewing of the spring

being indicated by viewing arrows IV and V in the usual way;

5 Figures 6, 7, 8 and 9 show a second embodiment of the invention in views corresponding somewhat to those of Figs 2 to 5 being a side elevation view of the assembly, a plan view of a leaf spring forming one of two resilient means, a side elevation view of same and an end elevation view
10 respectively;

 Figures 10, 11, 12 and 13 show related views of a third embodiment of the invention, showing the assembly, and three views of a wire-format spring
15 forming resilient means therefor which is adapted to be mounted on the brake disc by co-operation of a wire end formation with a corresponding structure of the disc;

20 Figures 14 to 17 show a modification of the embodiment of Figs 10 to 13 in which the spring is adapted to straddle the disc at the inner periphery of the latter while cooperating with the associated hub;

25 Figures 18, 19, and 20 show a leaf spring embodiment, being an assembly view of the disc and hub and spring assembly, and a side elevation view of the spring, and another view of the spring;

30 Figures 21, 22 and 23 show another wire-spring format embodiment, Fig 21 showing the disc and springs in assembly and Figs 22 and 23 showing side elevation and plan views of the springs

respectively;

Figures 24 to 27 show a further wire-spring format
embodiment in which the spring straddles an
5 inwardly-directed drive formation on the disc; and

Figures 28 to 30 show a further leaf-spring-format
embodiment, Fig 28 showing the disc and spring in
assembly and Figs 29 and 30 showing plan and side
10 elevation views of the spring respectively.

In Fig 1 the thermal and related mass aspects, which will be
referred to and described more fully below, are indicated by
references A to E in which:

- 15 A refers to the Thermal Differential;
B refers to the Relatively Massive Hub;
C refers to the Spring Effect;
D refers to the Uniform Control of Dynamics; and
E refers to the Localised Spot-Type brake effect.

20

As shown in Fig 1 a spot-type automotive disc brake 10
comprises rotatable brake discs 12, 14, a rotatable mounting
or hub 15 for the discs 12, 14 to permit such rotation and
which is adapted to drive the brake discs and to have
25 exerted thereon a braking effect by the brake discs when
disc brake 10 is actuated.

Two pairs of friction elements indicated at 16, 18 and 20,
22 are adapted to frictionally engage braking surfaces on
30 opposite sides of brake discs 12, 14 to effect braking on
actuation of actuation means 24 therefor. Brake discs 12, 14
are axially slidable in use with respect to mounting hub 15
therefor under the action of friction elements 16, 18 and
20, 22 and actuation means 24 during braking.

Resilient means 26 is provided at circumferentially spaced positions around brake discs 12, 14 and is adapted to act between the brake discs and the mounting therefor at said positions. The mounting of the resilient means 26 with
5 respect to the brake disc 12, and on same, is such that the resilient means slides axially with the disc.

Also shown in Fig 1 at 28 is an indication of the thermal differential which exists between rotatable mounting or hub
10 15, which has a relatively massive construction, and the brake discs 12, 14 at which actuation means 24 causes a localised spot-type braking effect.

Likewise shown in Fig 1 at 30 is the uniform control of dynamics D (in relation to axial movement of the brake discs
15 12, 14), which is a desideratum in relation to the function of resilient means 26 acting between hub 15 and brake discs 12, 14, as discussed above. In other words, and in particular in the case of brakes including multiple discs,
20 it is desirable for the axial movement of the individual discs to be controlled in a uniform manner with the springs providing a uniform effect over the operating range of movement.

Turning now to the embodiments of Figs 2 to 27, these will be described with reference to the general structure shown in Fig 1 in which the rotatable mounting or hub 15 and one of the axially slidable brake discs 12 is shown in each of the seven embodiments as part of an assembly which may
30 comprise one, two or more discs and an associated hub, as shown diagrammatically in Fig 1. It is to be understood that the purely diagrammatic representation shown in Fig 1 is intended to be simply a convenient reference base for the technically competent person, for purposes of description,

detailed structures being shown in the remaining figures.

In the embodiments of Figs 2 to 27, the resilient means which is provided at circumferentially spaced positions around the brake discs and which is adapted to act between the brake disc 12 and the mounting for the brake disc 12 at those positions itself comprises mounting means for the resilient means (in the form of a spring or springs) which is adapted to mount the resilient means at these circumferentially spaced positions on the brake disc or discs, so that when the resilient means is so mounted it applies a resilient bias directed from the mounting of the resilient means on the disc to the rotatable mounting or hub on which the disc is mounted. The resilient bias, or force acting between the disc 12 and hub is provided and generated by virtue of the resilience of the resilient means and deformation or bending of the resilient means. As will be understood by the person skilled in the art, deformation or bending of resilient means induces stress, for example torsional stress in the case where the resilient means are twisted, this induced stress in the resilient means generating forces acting in the opposite direction to the deformation or bending and tending to counter the deformation or bending.

25

The seven embodiments described below differ in the details whereby the resilient means is mounted on the disc.

As shown in Fig 2, disc 12 is mounted on hub 15 by means of a series of inwardly projecting keys or drive formations 32 of inwardly tapering format which enter correspondingly-profiled keyways 34 or grooves formed in the hub. In this embodiment, the resilient means 26 is constituted by a wire spring 36 of generally endless loop format and having two

inwardly-directed portions defining a waist 38 adapted to fit around key 32 so that the lateral side portions 40, 42 of the spring can act on the outwardly-facing surface 44 of hub 15 at each side of the disc. The portions 37 of the spring 36 within the waist 38 bear against the disc 12 so that the spring 36 provides a force between the disc 12 and the hub 15. For this purpose, the side portions 40, 42 have smoothly-curved contact profiles 46, 48 with upturned ends 50, 52.

10

As shown in fig 4, spring 36 has (inside elevation) a generally convex profile between its upturned ends 50, 52 whereby, by virtue of its wire spring construction, it exerts the required resilient effect between disc 12 and hub 15.

15

In this embodiment, four keys and corresponding springs are provided per disc. Each spring is retained by its respective key.

20

Turning to the embodiment of Figs 6 to 9, in this embodiment the resilient means 26 is provided by a pair of leaf springs 54, 56, for each key 32 on brake disc 12. The leaf springs each comprise a pair of resilient flanges 58, 60 adapted to grip the disc on opposite sides thereof and a profiled location flange 62 adapted to cooperate with the profile of a curved recess at each side of key 32, and further comprising a leaf spring end portion 66 to exert the resilient force on hub 15. The location flange 62 bears against the disc 12 whilst the leaf spring end portion 66 bears against the hub 15. As shown in Fig 6, two such leaf springs 54, 56 are provided one at each side of key 32 of disc 12.

25
30

Turning now to the embodiment of figs 10 to 13, in this embodiment the spring 70 of the resilient means is of wire-spring format and comprises a portion 72 extending between opposite sides of the disc 12 and having an end portion 74 at one side which engages structure at one side of the disc and a hairpin-form spring format 76 at the other side of the disc for engagement with hub 15. The portion 72 extending between opposite sides of the disc abuts against and engages the disc 12 whilst the curved profiled portion 71 of the hairpin portion 76 bears against the hub 15.

As previously, four such springs are provided per disc, with the hairpin spring portions 76 disposed alternately at opposite sides of the disc.

In the embodiment of figs 14 to 17, the wire spring 80 likewise has a portion 82 extending between opposite sides of the disc, and spring end portions 84, 86 of generally linear format in plan view and convex format in side elevation view. The end portions 84, 86 provide spring force application on hub 15 at opposite sides of the disc 12 whilst the spring is constrained by portion 82 which abuts against and engages the disc 12.

In this embodiment four springs are provided per disc, although only three can be seen in Fig 14.

In the embodiment of figs 18 to 20, a leaf spring 90 has a leaf portion 91 is of generally arcuate format (see fig 19) and comprises resilient flanges 92 to grip the disc 12 at opposite sides thereof. The profile of leaf portion 91 in the unloaded condition, is linear, whereby the loading of the spring to the curved profile shown in fig 19 produces the requisite spring force. When installed, the end portions

93 of the spring 90 abut and bear against the inner periphery of the disc whilst the central portion 89 of the spring 90 bears against the outer peripheral surface of the hub 15. The spring 90 is also constrained and held in the arcuate shape by the abutment of the end portions 93 with the keys 32 of the disc.

In the embodiment of figs 21 to 23, a loop-format wire spring 100 is of generally bowed side elevation profile when installed on the disc 12 as shown in fig 22 and located between mounting formations 102 so as to have the arcuate profile shown in fig 21 for resilient engagement with hub 15. The spring 100 initially has a generally linear flat natural shape and is deformed and flexed into its bowed side elevation profile when installed on the disc. This bowing of the spring produces the requisite spring force. It will be appreciated though that an initially bowed spring 100 could be used which is then further bowed when installed. Disc 12 has a special profile at its inner edge, incorporating mounting formations 102 and keys 104. The mounting formations 102 comprise grooves in the disc 12 within which the ends 101 of the springs 100 are engaged, thereby constraining the spring 100. A central portion 99 of the spring 100 abuts against an outer peripheral surface of the hub 15.

In the embodiment of figs 24 to 27, disc 12 has extended keys 110 around which a generally X-format (in side elevation) wire spring 112 is straddle-mounted so that as the key enters an opening 114 (see fig 25) defined by double loops 116, 118 and 120, 122, the X-format structure of the spring 112 provides the resilient effect acting between the disc 12 and the hub 15, as clearly shown in fig 24.

In the embodiment of Figs 28 to 30 the disc 12 has keys 132 which engage in keyways in the hub 15. The resilient means comprises a spring of spring steel 130. The strip 130 in its uninstalled, unloaded condition is generally linear as shown in Figs 28 to 30. The strip includes a number of apertures 140 within it and at each end 136, 138 there are recesses or notches 135. In the installed loaded condition of the strip 130 it is bent and mounted within the disc 12 with the apertures 130 fitting over and straddling the keys 132 of the disc. The end of the strip 130 abut against one 132A of the keys 132 with the notches 135, 137 engaging on either side of that key. The three apertures 140 are equally spaced so as to receive the three other keys 132 of disc 12 and the portions of strip 130 therebetween extend in use, in a generally chordal direction relative to the disc inner periphery and provide the resilient effect acting between the disc 12 and the hub 15 (not shown) which is mounted within the disc. It will be appreciated that the outer periphery of hub 15 abuts against the portions 131 of strip 130 between apertures 140.

CLAIMS

1. A method of mounting a brake disc in a spot-type disc brake, the disc brake comprising :-

5 a) at least one rotatable brake disc;

b) a rotatable mounting for said brake disc to permit such rotation and which is adapted to drive said brake disc and to have exerted thereon a braking effect by said brake disc when the disc brake is actuated;

10 c) at least one pair of friction elements adapted to frictionally engage braking surfaces on opposite sides of said brake disc to effect braking on actuation of actuation means therefor;

15 d) said brake disc being axially slidable in use with respect to said mounting therefor under the action of said friction elements and said actuation means therefor during braking;

20 e) resilient means being provided at circumferentially-spaced positions around said brake disc and adapted to act between said brake disc and said mounting therefor at said positions;

characterised by said method comprising :

25 f) providing said resilient means comprising mounting means therefor adapted to mount said resilient means at said circumferentially spaced positions on said at least one brake disc, and causing said resilient means when so mounted to apply a resilient bias directed from the mounting of said resilient means on said disc to said rotatable mounting for said brake disc; and

30 g) the method further comprising the step of moving said resilient means with said disc when said disc moves axially during use of said brake.

2. A method of mounting a brake disc in a disc brake

comprising providing resilient means adapted to act between a brake disc and a rotatable mounting therefor at circumferentially spaced positions around said disc, and providing mounting means for said resilient means, and the
5 method comprising causing the resilient means to be mounted on the disc and to apply a resilient bias directed from the brake disc to the rotatable mounting therefor, said resilient means being mounted on said disc and moves axially with said disc with respect to said mounting for said disc
10 during use.

3. For use in a method according to claim 1 or claim 2 the combination of a brake disc and resilient means adapted to be mounted thereon and to apply to a rotatable mounting for
15 said disc a resilient bias as aforesaid.

4. A spot-type disc brake comprising :-
a) at least one rotatable brake disc;
b) a rotatable mounting for said brake disc. to permit
20 such rotation and which is adapted to drive said brake disc and to have exerted thereon a braking effect by said brake disc when the disc brake is actuated;
c) at least one pair of friction elements adapted to frictionally engage braking surfaces on opposite sides of
25 said brake disc to effect braking on actuation of actuation means therefor;
d) said brake disc being axially slidable in use with respect to said mounting therefor under the action of said friction elements and said actuation means therefor during
30 braking;
e) resilient means being provided at circumferentially spaced positions around said brake disc and adapted to act between said brake disc and said rotatable mounting therefor at said positions

characterised by

f) said resilient means comprising brake disc mounting means for said resilient means and adapted to mount said resilient means at said circumferentially spaced positions on said at least one brake disc said resilient means being simultaneously mounted on said brake disc, whereby in use said resilient means applies a resilient bias directed from said mounting of said resilient means on said disc to said rotatable mounting for said brake disc.

10

5. A disc brake comprising at least one rotatable brake disc and a rotatable mounting therefor, said brake disc being axially slidable with respect to said mounting, and resilient means acting between said disc and said mounting, characterised by said resilient means being mounted on said brake disc and adapted to apply a resilient bias directed from said brake disc to said rotatable mounting.

6. A disc brake according to any one of claims 3 to 5 characterised by said resilient means being adapted to straddle projecting drive keys or elements formed on said disc to cooperate with keyways or grooves formed in said rotatable mounting for said brake disc.

7. A disc brake according to any one of claims 3 to 5 characterised by said resilient means comprising a leaf spring adapted to grip said disc between resilient flanges formed on said resilient means.


8. A disc brake according to any one of claims 3 to 5 characterised by said resilient means comprising a spring adapted to be lodged between said brake disc and said rotatable mounting therefor and to exert said resilient bias by virtue of stress set up therein.

9. A method of mounting a brake disc in a disc brake substantially as described herein with reference to the accompanying drawings.





5

10. A disc brake substantially as described herein with reference to the accompanying drawings.

-1/9-

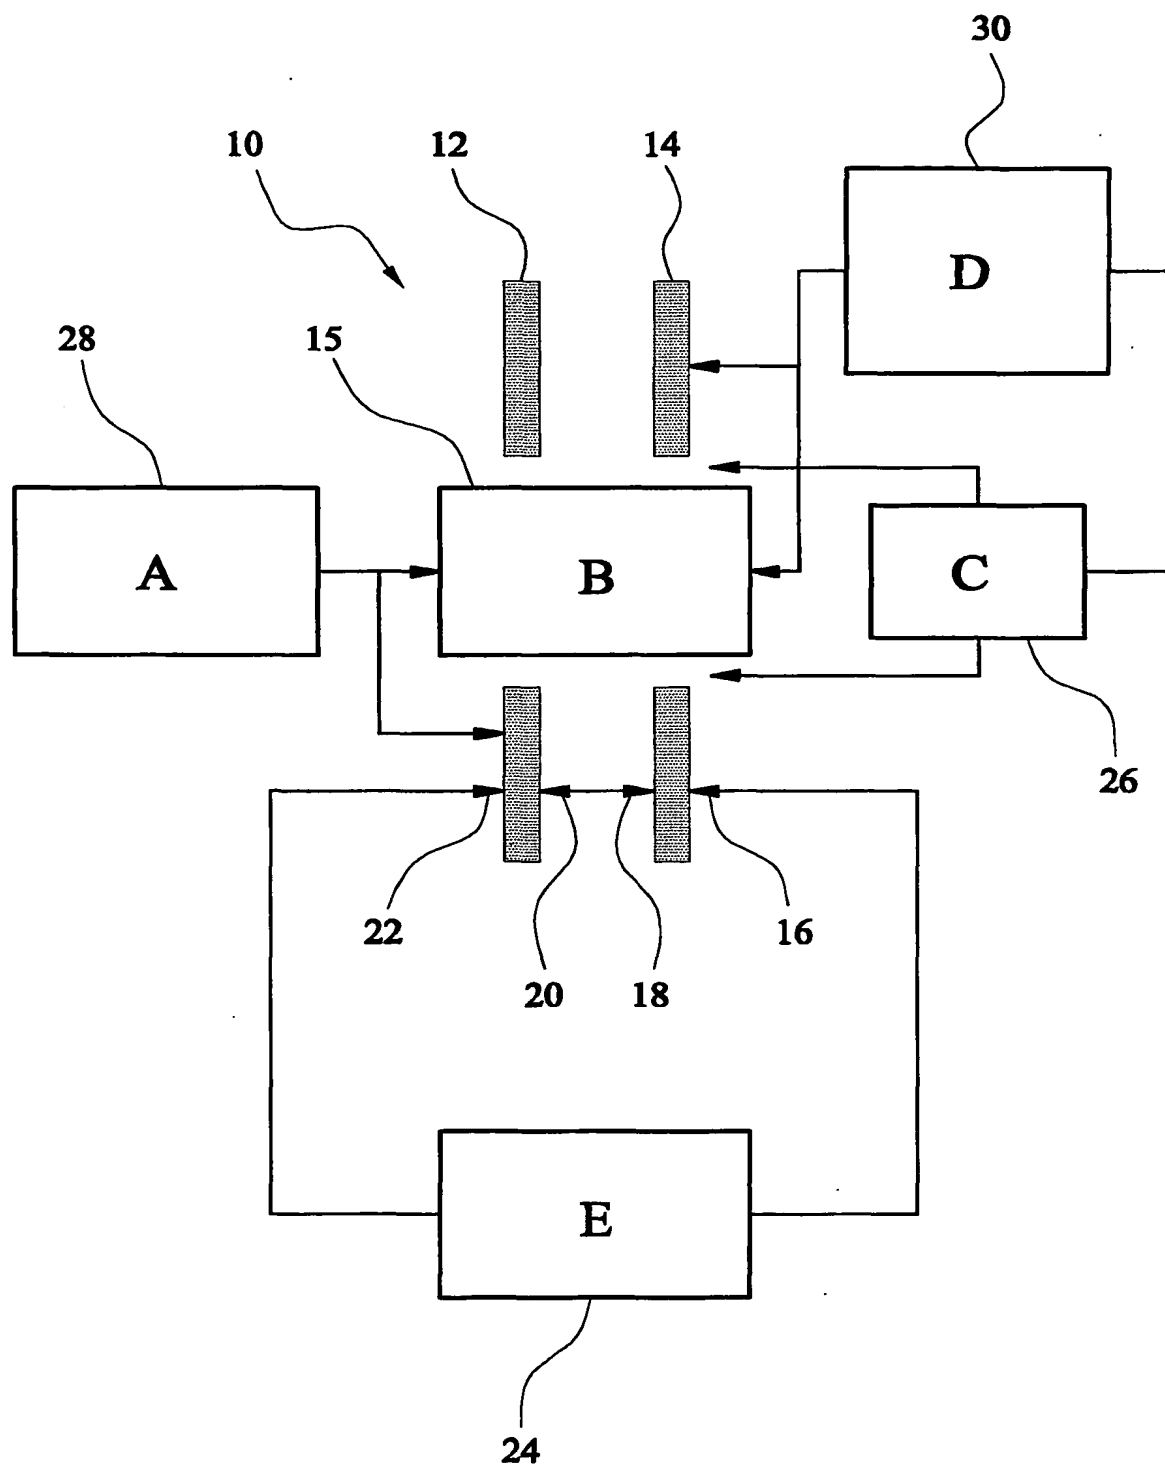**FIG. 1**

-2/9-

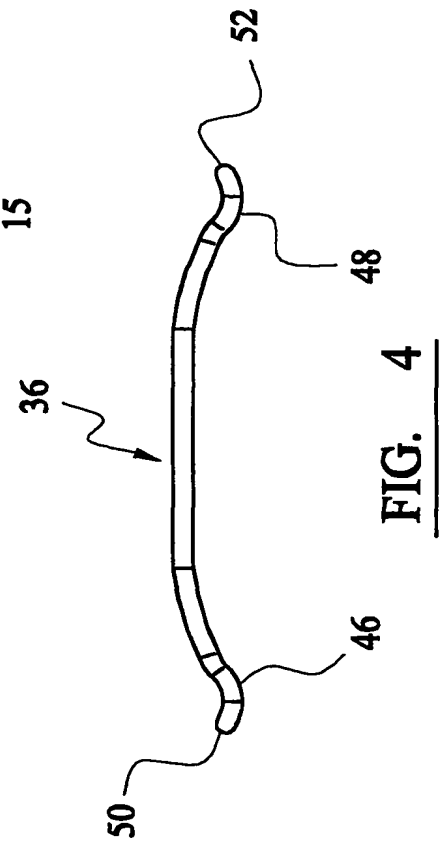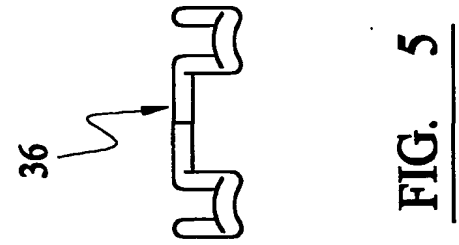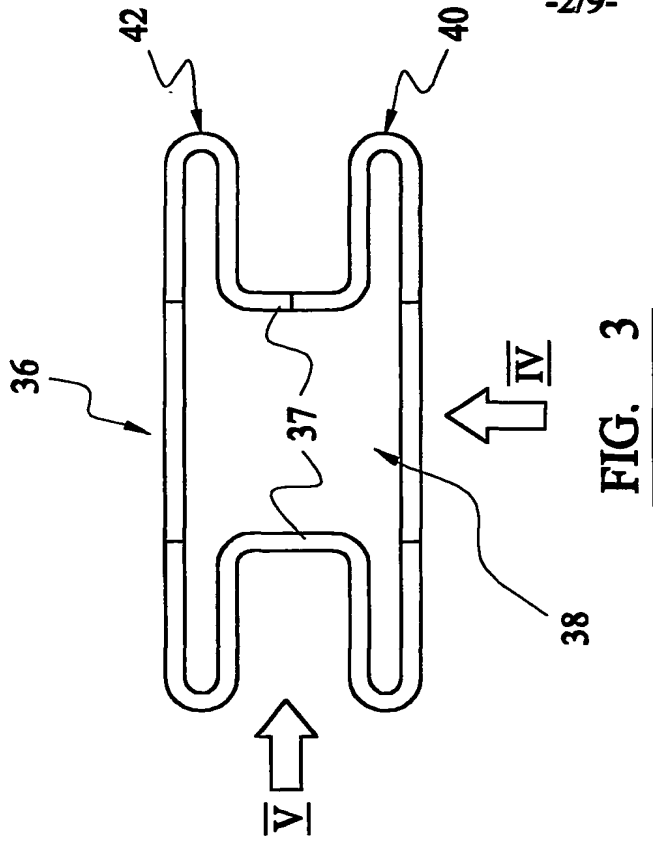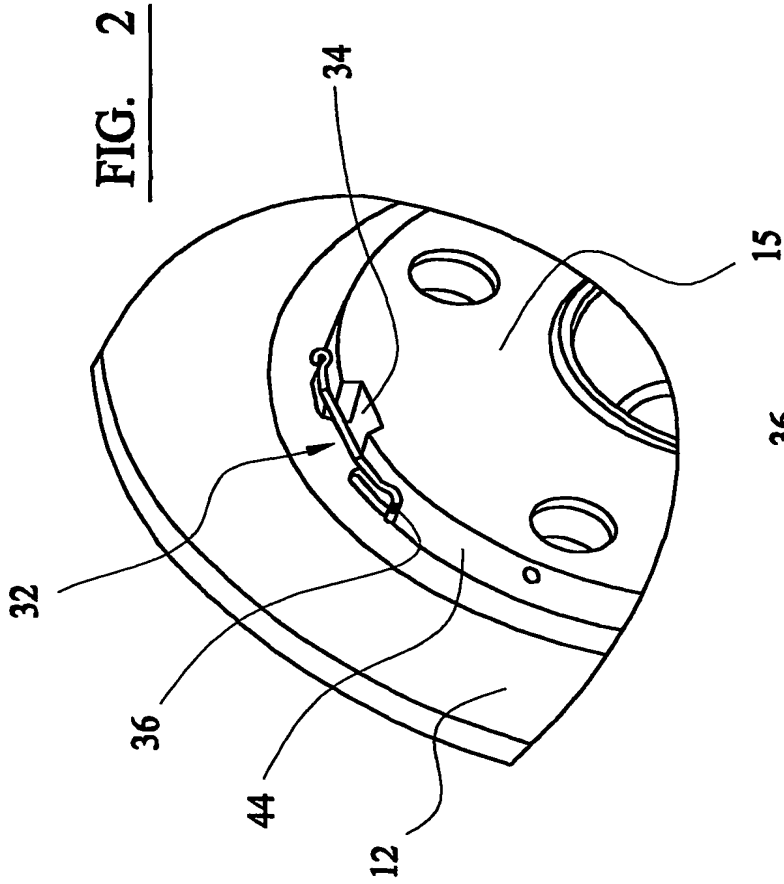

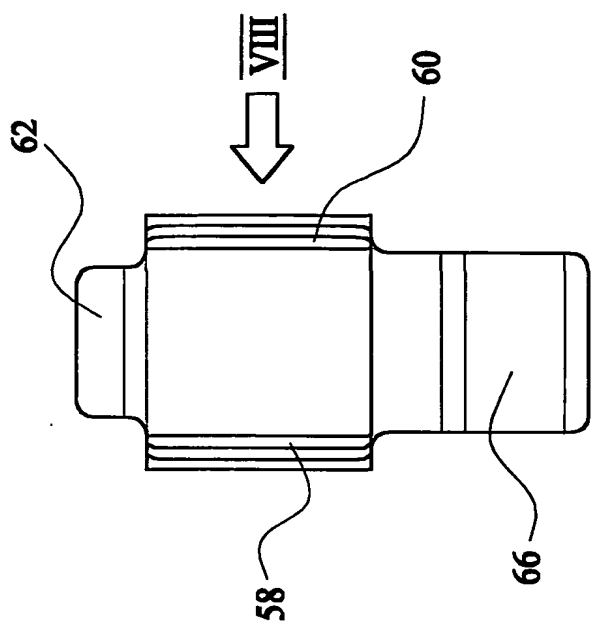


FIG. 7

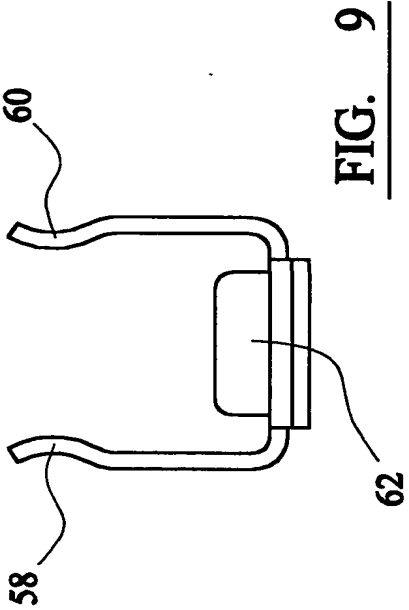


FIG. 9

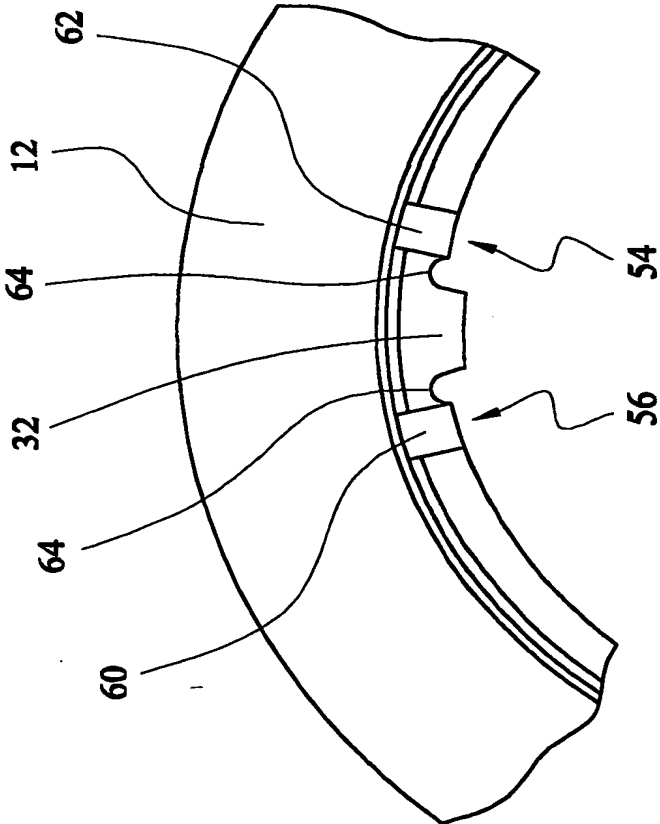


FIG. 6




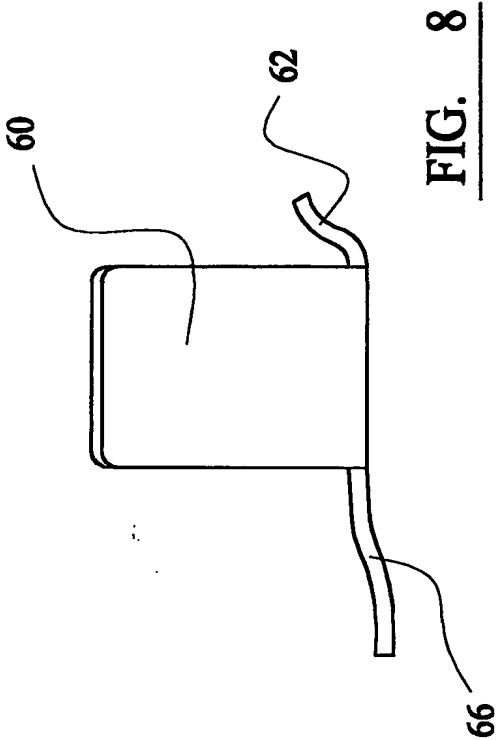



FIG. 8

-4/9-

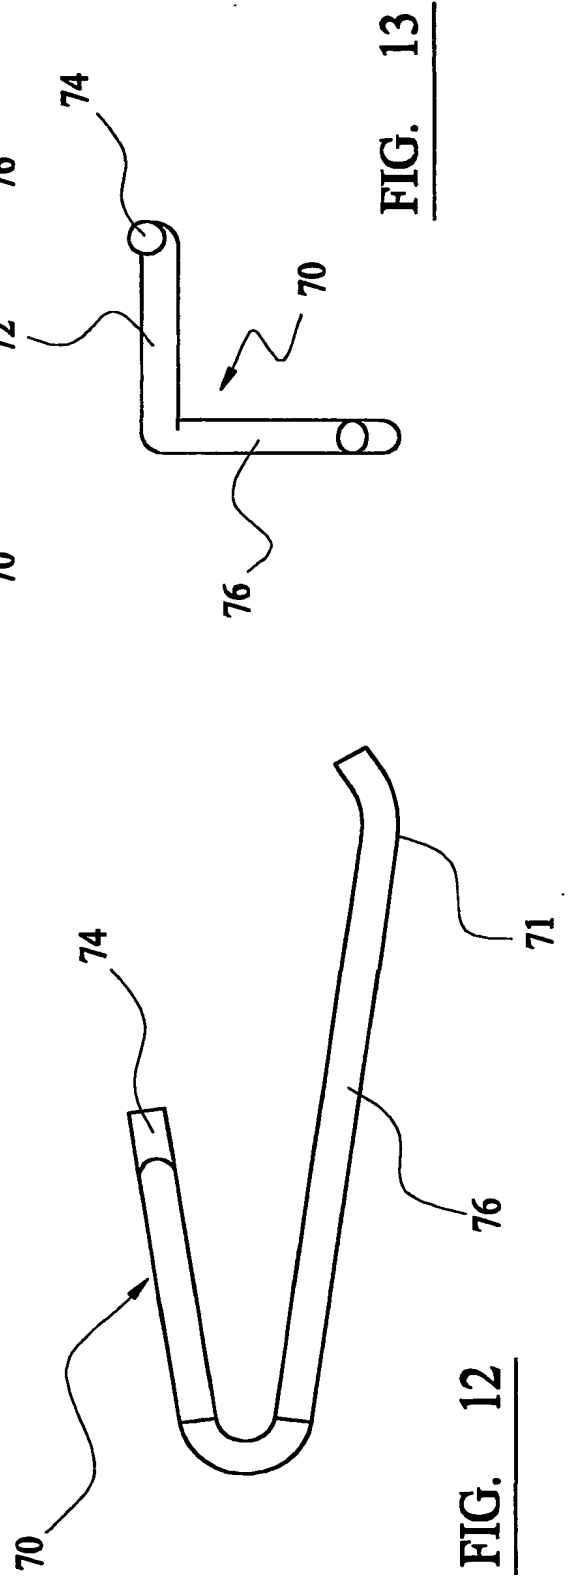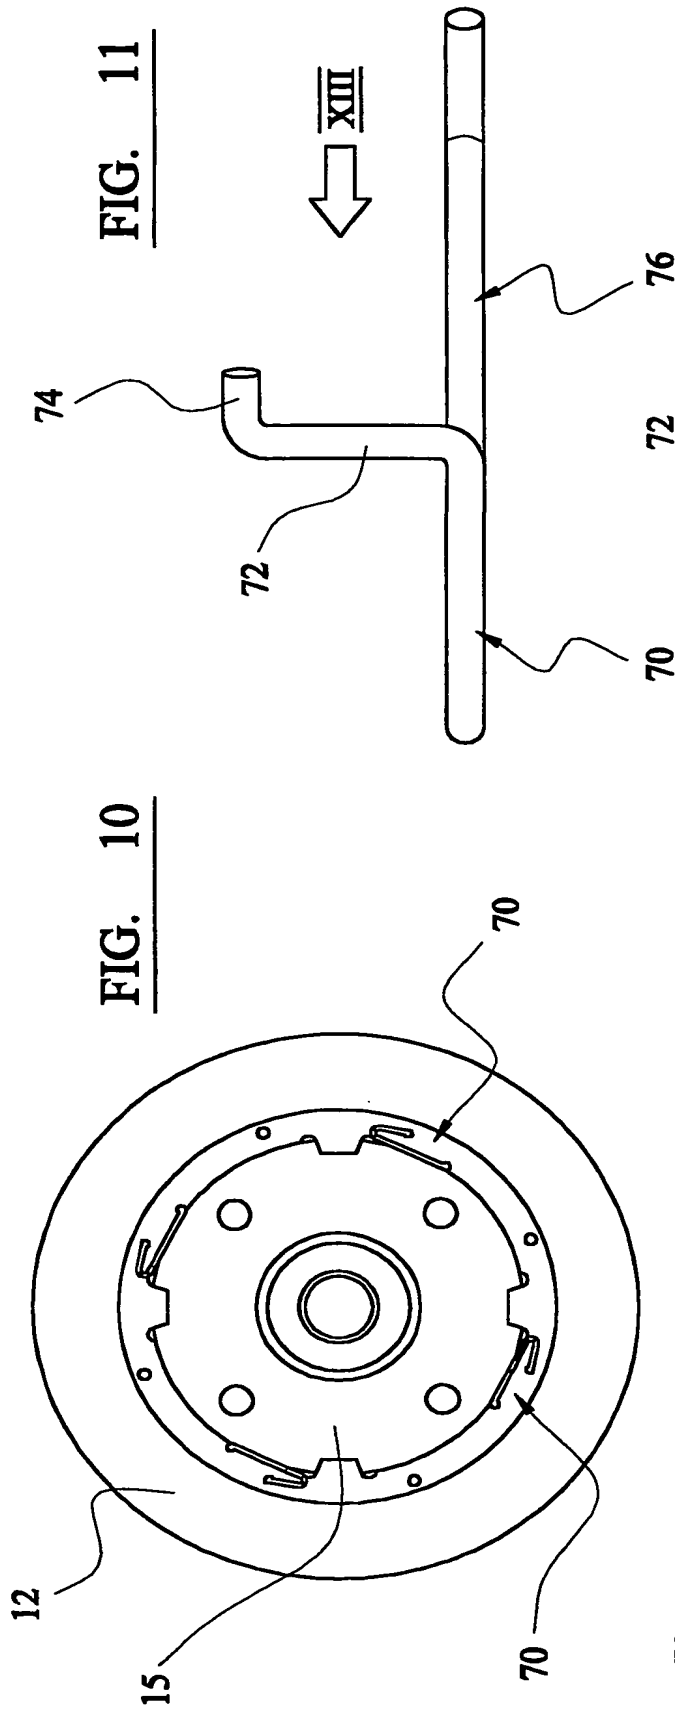

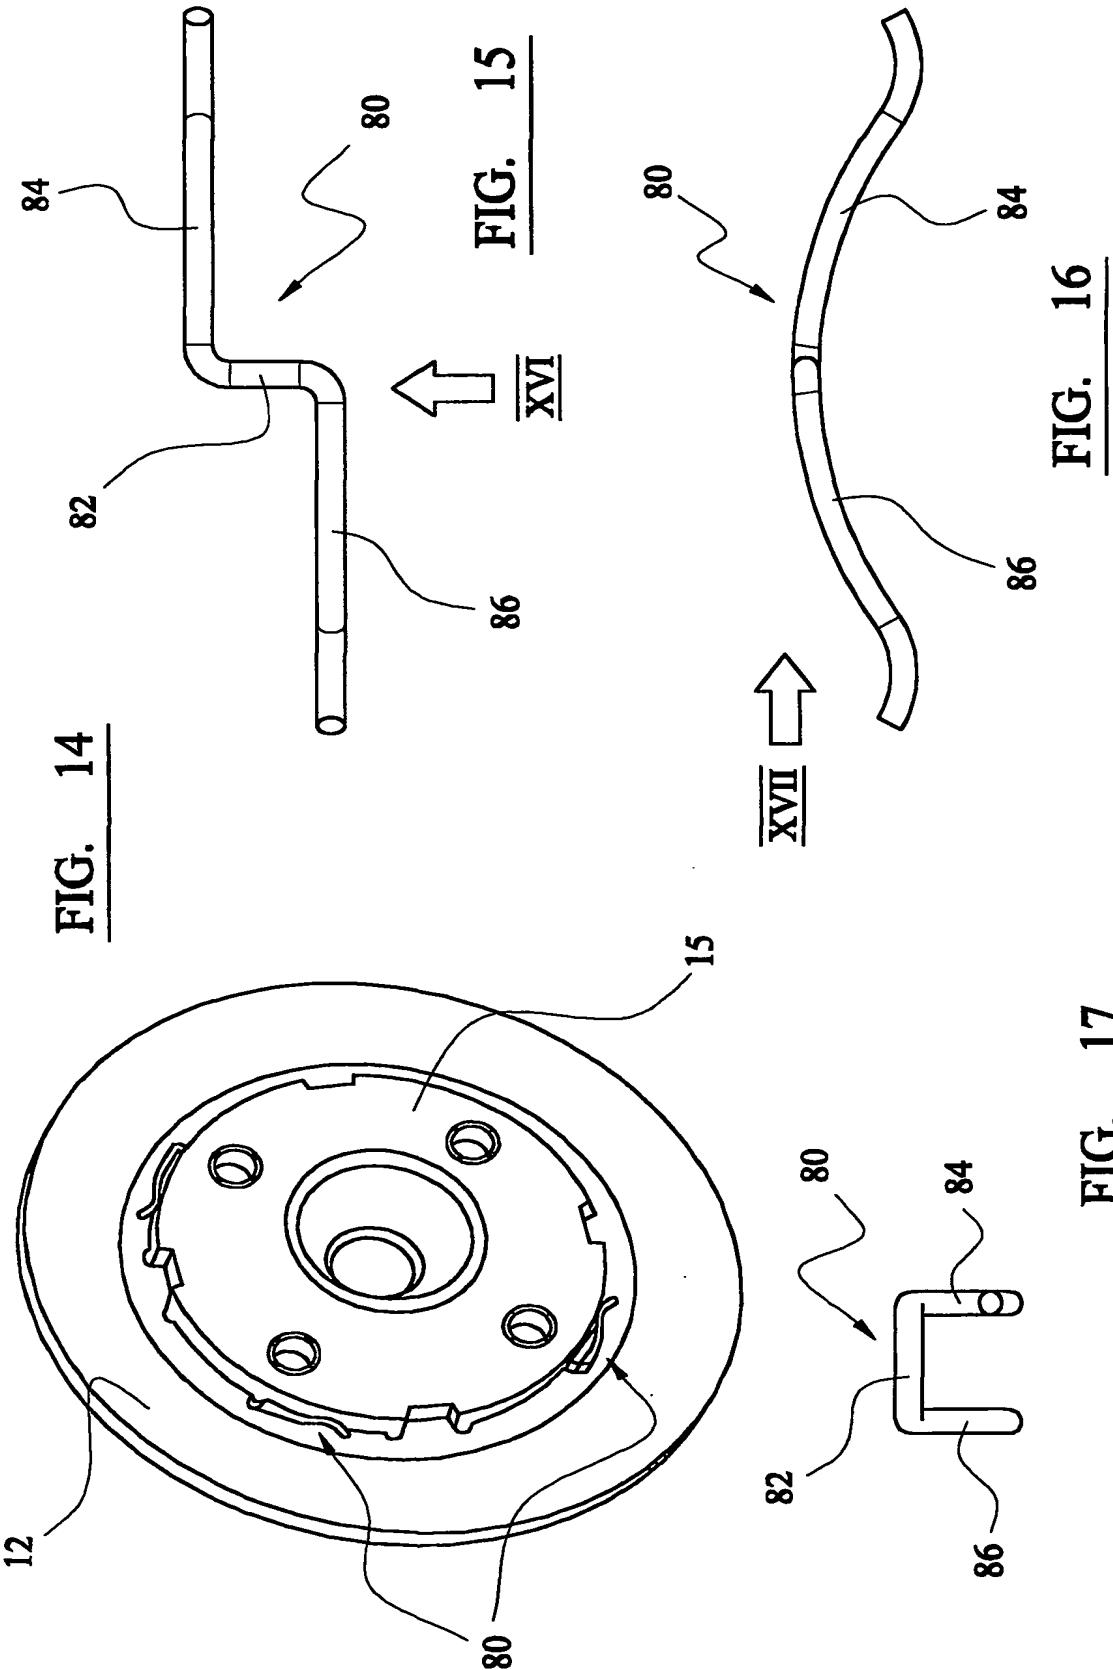

-6/9-

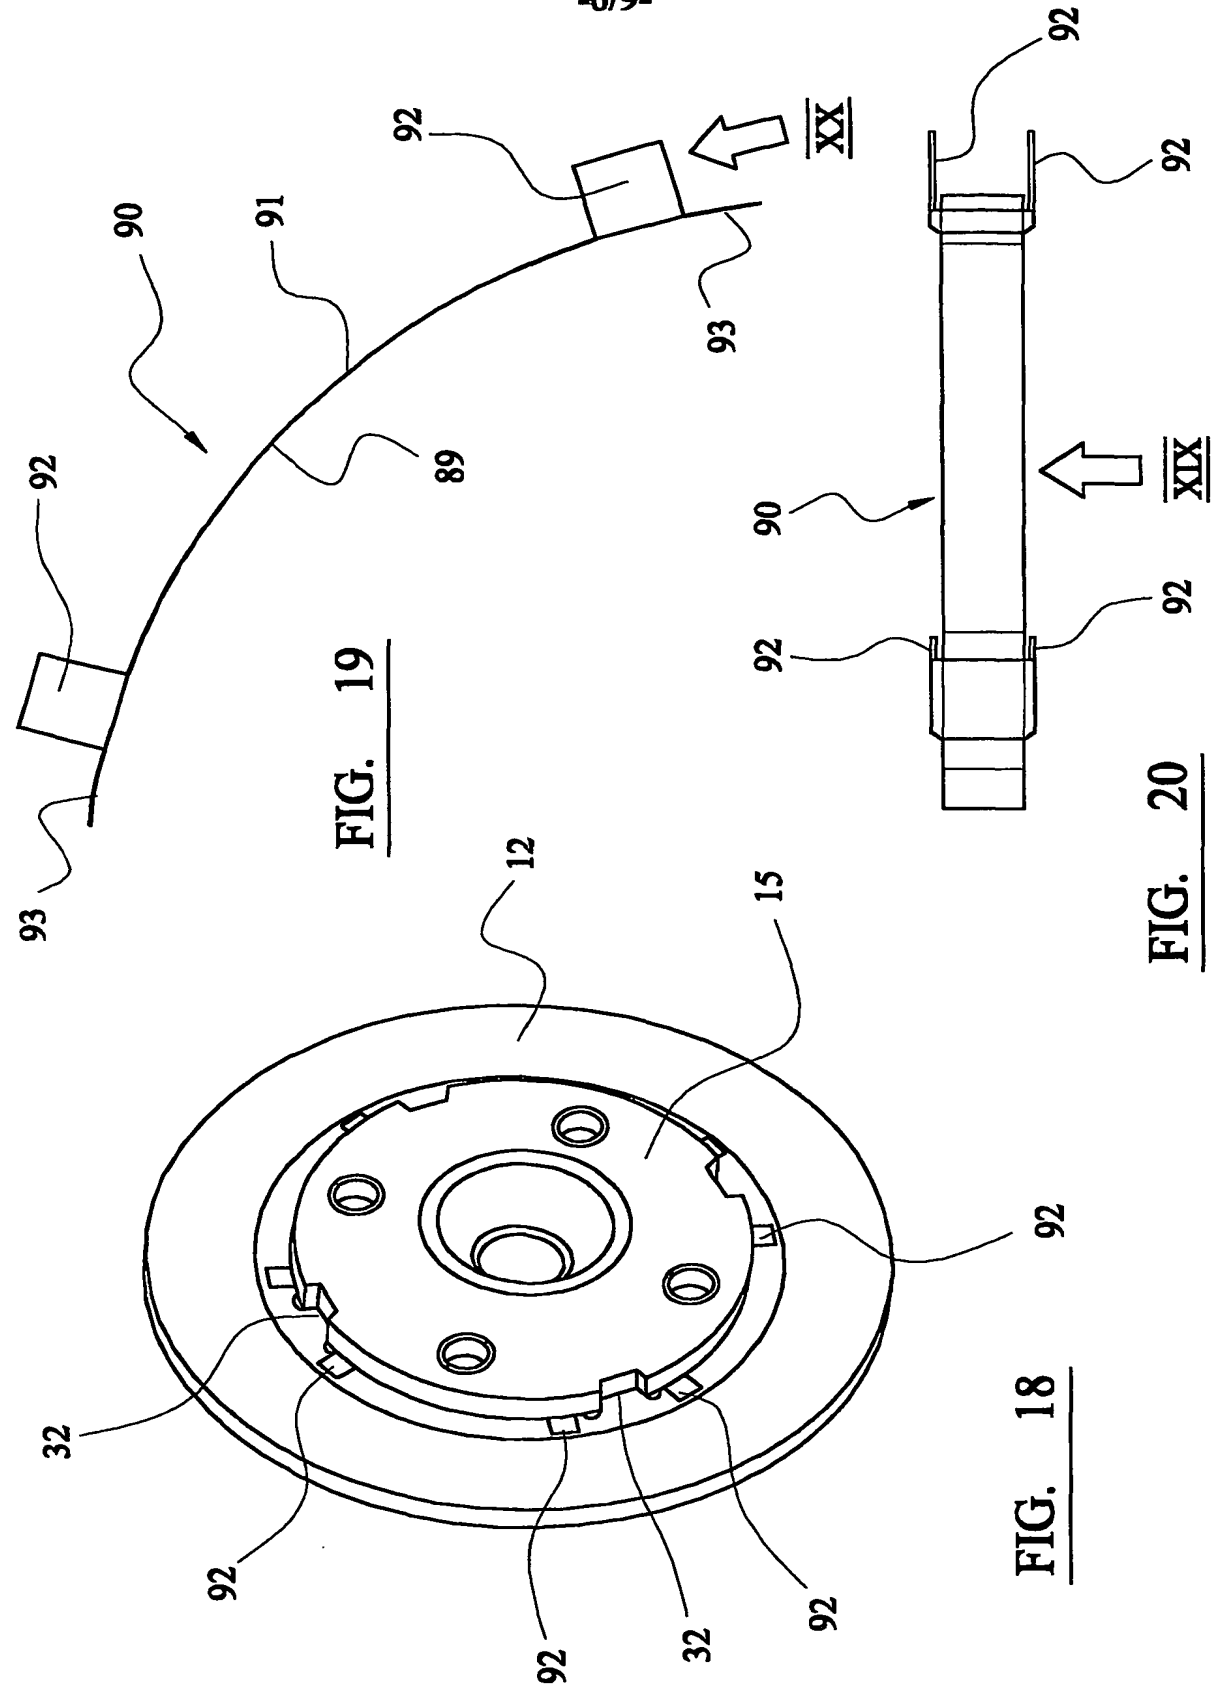

-7/9-

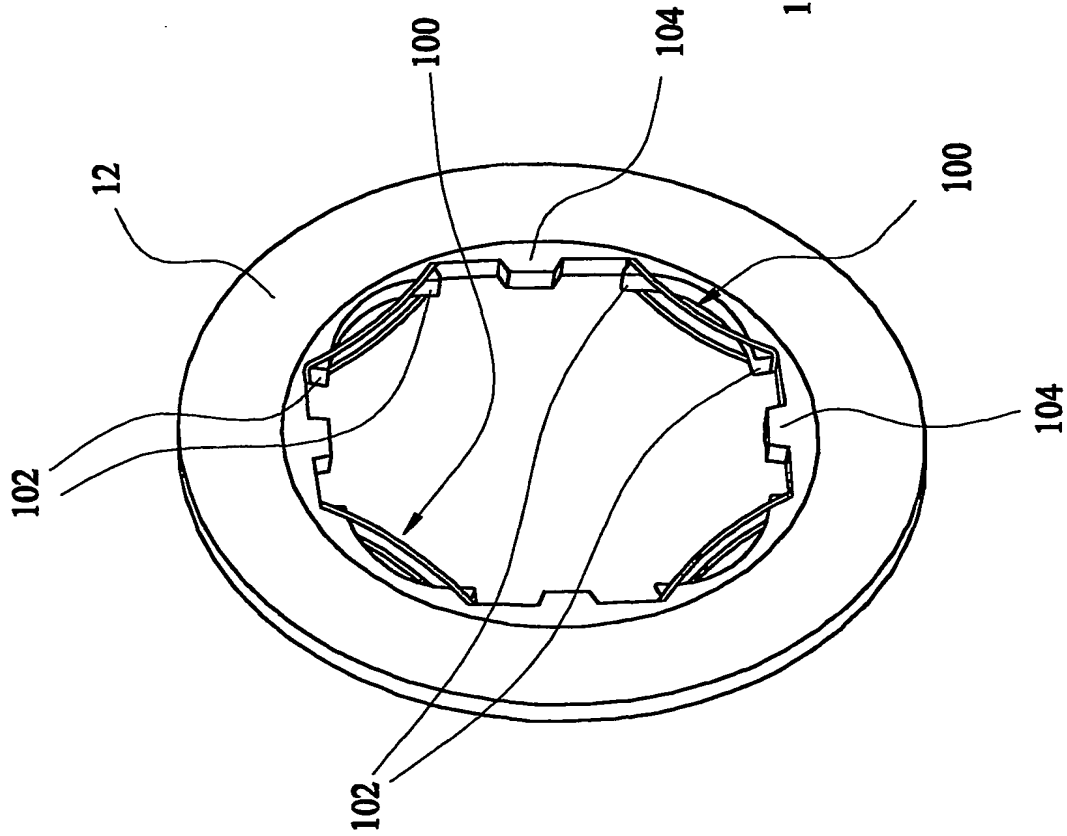


FIG. 21

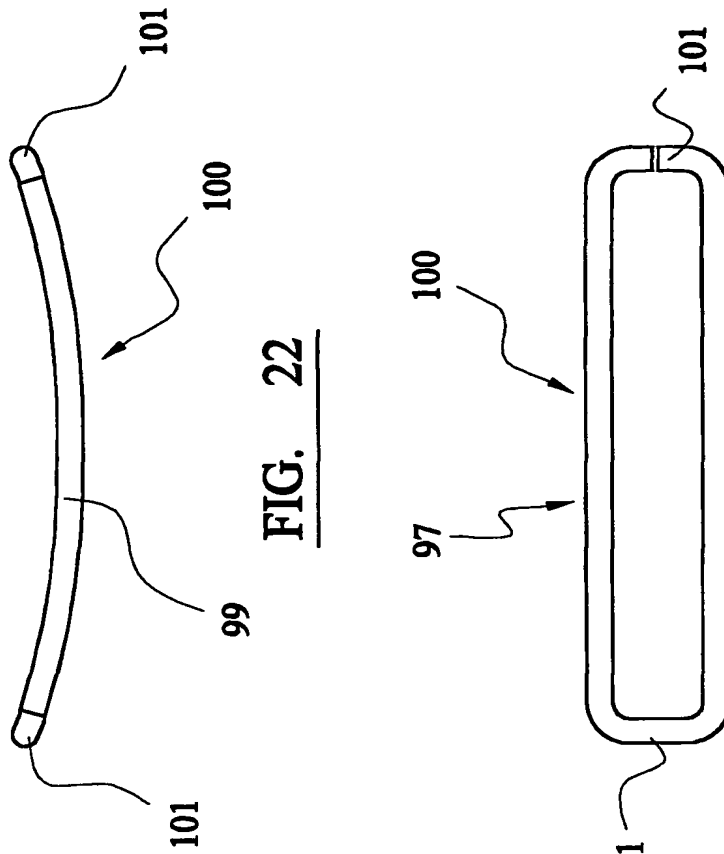


FIG. 22

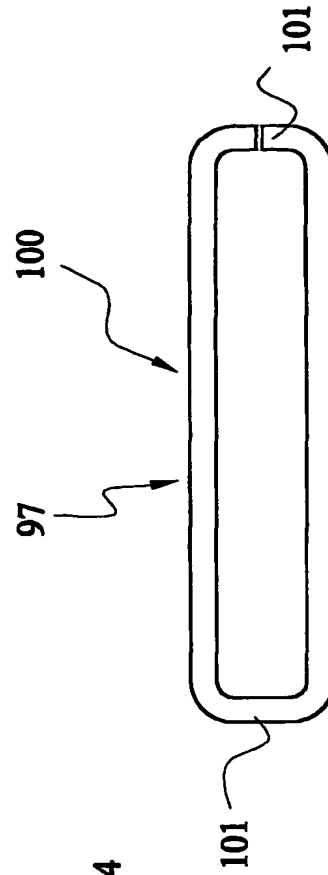


FIG. 23

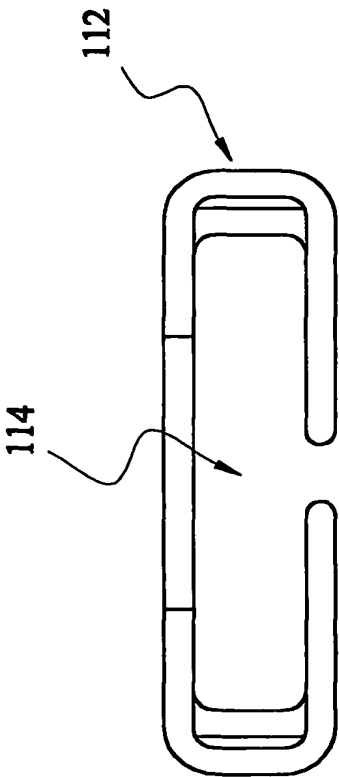


FIG. 25

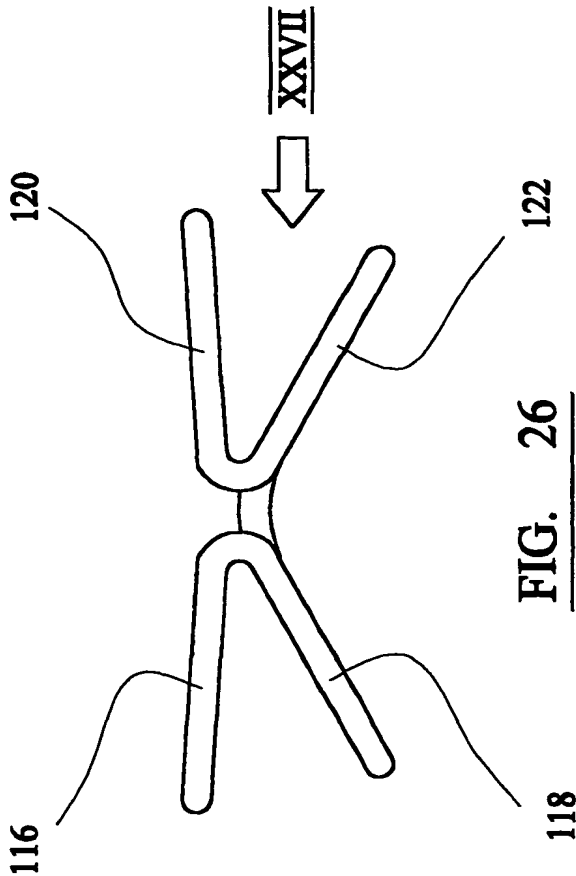


FIG. 26

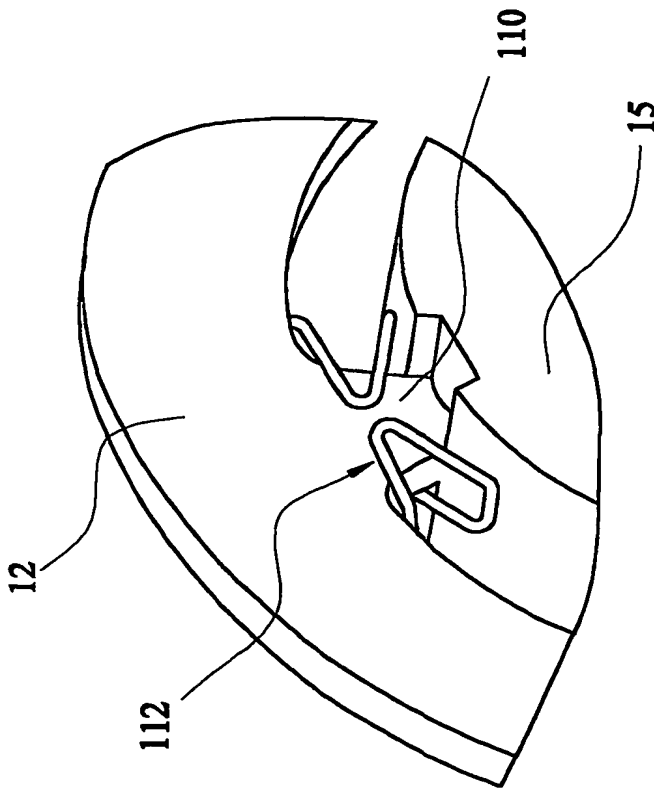


FIG. 24

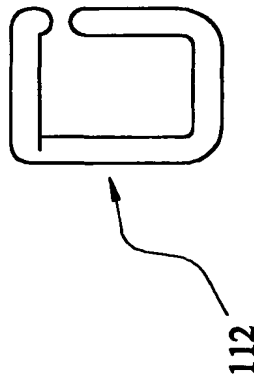


FIG. 27

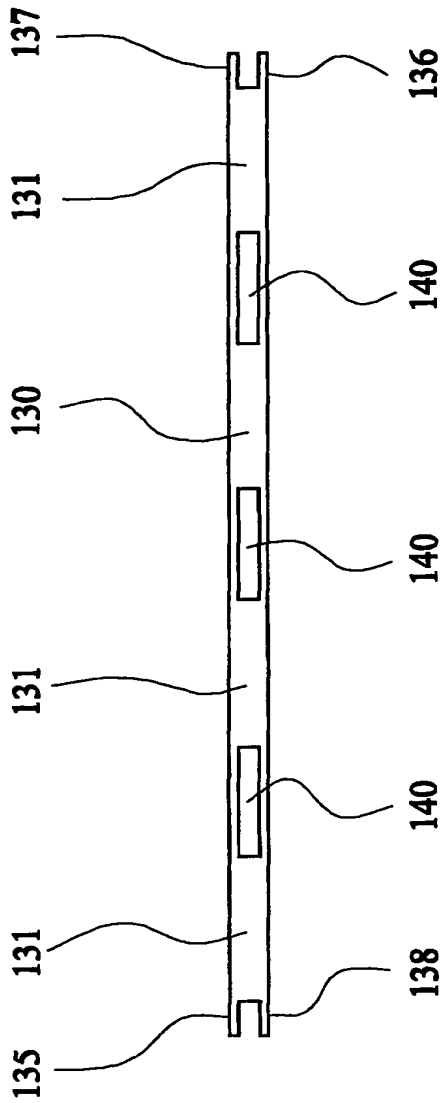


FIG. 29

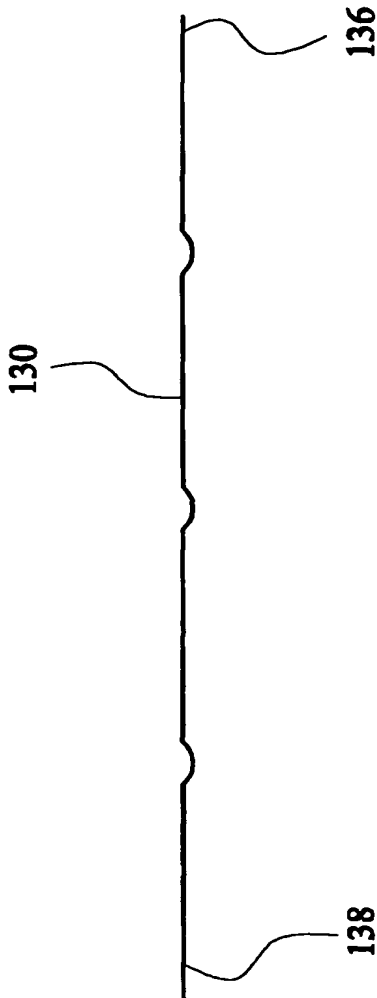


FIG. 30

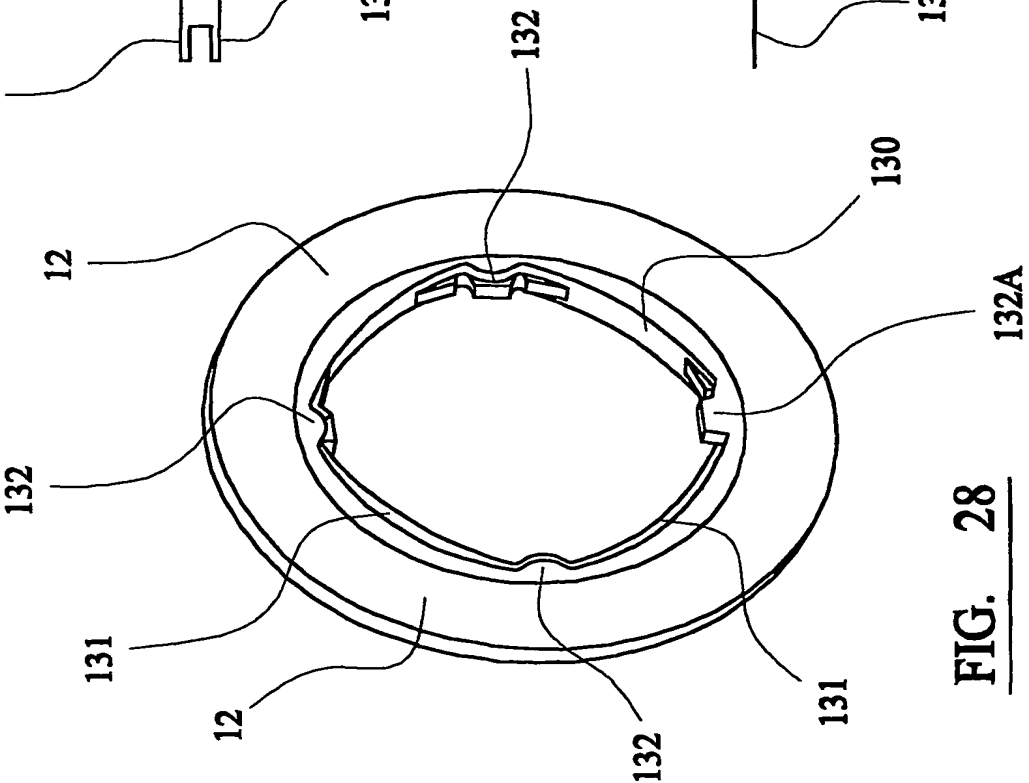


FIG. 28

INTERNATIONAL SEARCH REPORT

Intern Application No

PCT/GB 01/01958

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F16D65/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F16D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 256 209 A (LUEPERTZ HANS-HENNING) 17 March 1981 (1981-03-17) column 3, line 1 -column 4, line 65; figures 1,2	1-10
X	US 3 233 704 A (RELIANCE ELECTRIC & ENGINEERING COMPANY) 8 February 1966 (1966-02-08) column 2, line 27 -column 3, line 37; figures	1-5, 7-10
X	US 3 642 101 A (HAUTH JEAN-MARC) 15 February 1972 (1972-02-15) column 1, line 1-42 -column 2, line 56-60; figures 1-3, 5, 6	1-5, 7-10
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

12 July 2001

Date of mailing of the international search report

03/08/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Berthommé, E

INTERNATIONAL SEARCH REPORT

Intern Application No

PCT/GB 01/01958

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 318 306 A (FISCHER HORST) 9 March 1982 (1982-03-09) the whole document	1-5, 8-10
X	US 3 861 501 A (BABER JAMES R ET AL) 21 January 1975 (1975-01-21) abstract; figures 1-3	1-5, 7-10
A	DE 12 05 345 B (TELEFUNKEN) 18 November 1965 (1965-11-18) claims; figures	1-5, 7-10

INTERNATIONAL SEARCH REPORT

..... nation on patent family members

Inten Application No

PCT/GB 01/01958

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4256209	A	17-03-1981	DE 2807485 A ES 477593 A FR 2418385 A GB 2015122 A,B IT 1192694 B JP 1291984 C JP 54123662 A JP 60014939 B SE 436787 B SE 7901530 A	23-08-1979 16-06-1979 21-09-1979 05-09-1979 04-05-1988 29-11-1985 26-09-1979 16-04-1985 21-01-1985 23-08-1979
US 3233704	A	08-02-1966	NONE	
US 3642101	A	15-02-1972	FR 2040586 A DE 2015873 A GB 1238630 A	22-01-1971 08-10-1970 07-07-1971
US 4318306	A	09-03-1982	DE 7825113 U BR 7905403 A FR 2434302 A GB 2028465 A,B IT 1123526 B NL 7906245 A SE 7906515 A	11-01-1979 20-05-1980 21-03-1980 05-03-1980 30-04-1986 26-02-1980 24-02-1980
US 3861501	A	21-01-1975	NONE	
DE 1205345	B		NONE	

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference P54615W0	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/GB 01/ 01958	International filing date (day/month/year) 17/04/2001	(Earliest) Priority Date (day/month/year) 05/05/2000
Applicant DELPHI TECHNOLOGIES INC.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.



It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.



the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :



contained in the international application in written form.



filed together with the international application in computer readable form.



furnished subsequently to this Authority in written form.



furnished subsequently to this Authority in computer readable form.



the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.



the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,



the text is approved as submitted by the applicant.



the text has been established by this Authority to read as follows:

METHOD AND APPARATUS FOR MOUNTING A BRAKE DISC WITH RESILIENT BIAISING MEANS

5. With regard to the **abstract**,



the text is approved as submitted by the applicant.



the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.



as suggested by the applicant.



because the applicant failed to suggest a figure.



because this figure better characterizes the invention.

24



None of the figures.